



COMPANY PROFILE

Founded in 2008, Nuanhui Group is a professional high-tech enterprise engaged in packaging machinery, covering independent R&D, design, precision manufacturing, global sales and integrated services. After years of industry dedication, we have developed into a competitive and influential benchmark brand in China ' s packaging machinery sector. We own a standardized production base of over 48, 000 square meters with complete supporting facilities. Equipped with dozens of world-class precision devices including Swiss laser cutters, Canadian CNC bending machines, Taiwanese CNC machining centers and robotic welding equipment, we implement refined and intelligent production management to ensure consistent product precision and stable quality. We uphold strict quality management and technological innovation. With a professional R&D team and standardized internal management system, we have obtained ISO9001 quality system certification and EU CE certification. We hold more than 20 invention and utility model patents, and our core automatic strapping machine has won the official “ Technological Innovation Award ” , demonstrating our outstanding technical strength. Our diverse product lineup includes automatic strapping, box sealing, vacuum packaging, shrink packaging and automatic sealing machines, with support for customized equipment for special working conditions. We also provide full-intelligent packaging line solutions covering box opening, packing, sealing, palletizing and winding, catering to automated and large-scale packaging needs across various industries. Benefiting from reliable quality, cost-effective pricing, exquisite design and comprehensive after-sales service, our products are well received worldwide. We have built a sound domestic sales and service network and export to over 100 countries and regions in Europe, America, East Asia, the Middle East and beyond. We have been honored as “ China Excellent Packaging Enterprise ” and “ Top Ten Well? known Brands of Packaging Machinery ” . Focusing on talent cultivation, technological R&D and social responsibility, Nuanhui Group strives to build a united, inclusive and diversified modern enterprise. We always adhere to our core mission: to deliver high-quality packaging machinery and professional services that exceed customer expectations, and contribute to the high-quality development of the global packaging industry.



BTS-450/450A+BM-500

全自动L型热收缩包装机

Auutomatic L Type Shrink Wrapping Machine



产品概述/PRODUCT INTRODUCTION

适用于文具用品、食品、化妆品、制药、五金等行业的大批量收缩包装。采用PLC自动程序控制，操作简便，具有安全保护及报警功能，有效防止误切包装物。配有水平、垂直检测光电，便于切换选择。BTS-450A还具有密接功能，专为包装小产品设计。整套机器可实现与生产线的无人化操作连接。

It is suitable for large quantity shrink wrapping industries such as stationery, food, cosmetic, pharmaceutical, metal industries etc. plc automatic program control,easy operation,safety protection and alarm function, and effectively prevent incorrect packaging. Equipped with horizontal and vertical detection photoelectric, easy to switch selection. BTS - 450A has the function of contact, specially designed for packing small size products. The machine can be connected with the production line ,no need additional operators.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BTS-450/BTS-450A	BM-500
最大包装尺寸	Max Packing Size	(L+H)≤450mm (W+H)≤410mm (H)≤150mm	(L)700 × (W)400 × (H)200mm
最大封口尺寸	Max Sealing Size	(L)550 × (W)450mm	(L)1000 × (W)450 × (H)250mm(炉腔尺寸)
包装速度	Packing Speed	12 ~ 25包/分钟 packs/min	0 ~ 15m/min
电源及总功率	Electric Supply & Power	220V/50Hz 1.3kw	380V/50Hz 12kw
使用气源	Air Pressure	5.5kg/cm³	/
机器重量	Weight	440kg	240kg
机器外形尺寸	Overall Dimension	(L)1800 × (W)800 × (H)1600mm	(L)1300 × (W)700 × (H)1400mm

BTS-450/450A+BM-500L

全自动L型热收缩包装机

Auutomatic L Type Shrink Wrapping Machine



产品概述/PRODUCT INTRODUCTION

适用于文具用品、食品、化妆品、制药、五金等行业的大批量收缩包装。采用触摸屏与PLC自动程序控制，各种设置，操作均可在触摸屏上轻松完成。具有安全保护及报警功能，有效防止误切包装物。配有水平、垂直检测光电，便于切换选择。BTS-450A还具有密接功能，专为包装小产品设计。整套机器可实现与生产线的无人化操作连接。

It applies to stationery, food, cosmetics, pharmaceutical, hardware and other industries in a large number of shrink packaging.It adopts touch screen and automatic control of imported plc. All kinds of settings and operation can be completed easily on touch screen.The utility model has the functions of safety protection and alarm and can effectively prevent the mistake of cutting the package.It is equipped with horizontal and vertical detection photoelectric for easily switch options. BTS-450A also has contact function which designed for small products packaging.The whole machine can realize unmanned operation connected with the production line.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BTS-450/BTS-450A	BM-500L
最大包装尺寸	Max Packing Size	(L+H)≤450mm (W+H)≤410mm (H)≤150mm	(L)不限No limited × (W)450 × (H)250mm
最大封口尺寸	Max Sealing Size	(L)550 × (W)450mm	(L)1500 × (W)500 × (H)300mm(炉腔尺寸)
包装速度	Packing Speed	12 ~ 25包/分钟 packs/min	0~30m/min
电源及总功率	Electric Supply & Power	220V/50Hz 1.3kw	380V/50Hz 16kw
使用气源	Air Pressure	5.5kg/cm³	/
机器重量	Weight	440kg	470kg
机器外形尺寸	Overall Dimension	(L)1800 × (W)800 × (H)1600mm	(L)1800 × (W)1100 × (H)1300mm

BTA-500S+BM-500L

全自动L型垂直上下封切收缩包装机

Automatic L Type Vertical Shrink Wrapping Machine



产品概述/PRODUCT INTRODUCTION

本机适用于包装文具用品、食品、化妆品、制药等物品。采用先进PLC可编程控制器，同时有12组高精度伺服电机，可以做到一键切换，具有安全保护及报警装置，确保机器高速运转稳定性，各种设置操作均可在触摸屏上轻松完成。采用L型垂直上下封切设计，封口线高度可根据包装物高度而调整。配有进口检测光电，水平、垂直检测各一组，便于切换选择

This machine is suitable for packaging stationery, food, cosmetics, pharmaceuticals, and other items. Adopting the most advanced PLC programmable controller and 12 sets of high-precision servo motors, it can achieve one click switching, with safety protection and alarm devices to ensure the stability of high-speed operation of the machine. Various setting operations can be easily completed on the touch screen. Adopting an L-shaped vertical top and bottom sealing design, the height of the sealing line can be adjusted according to the height of the product. Equipped with imported detection photoelectric, one set for horizontal and vertical detection, easy to switch and select.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BTA-500S	BM-500L
最大包装尺寸	Max Packing Size	(L)≤550mm (W)≤400mm (W+H)≤430mm (H)≤170mm	(L)No limit×(W)450×(H)250mm
最大封口尺寸	Max Sealing Size	(L)≤550mm (W)≤450mm (H)≤200mm	(L)1500×(W)500×(H)300mm(tunnel size)
包装速度	Packing Speed	30~60包/分钟 packs per min	0~30m/min
电源及总功率	Electric Supply & Power	220V/50Hz 8kw	380V/50Hz 16kw
最大电流	Max Electric Current	32A	32A
使用气源	Air Pressure	5.5kg/cm³	/
机器重量	Weight	650kg	470kg
机器外形尺寸	Overall Dimension	(L)2000×(W)1100×(H)1700mm	(L)1800×(W)1100×(H)1300mm

BTH-400+BM-500

全自动边封收缩包装机

Automatic Side Sealing Shrink Wrapping Machine



产品概述/PRODUCT INTRODUCTION

全自动边封收缩包装机是在全自动高速边封机基础上，根据国内市场和客户的不同需求而设计出来的一款中型型全自动封切热收缩包装机，采用光电对产品进行自动检测，实现自动无人化包装，工作效率高，适合各种包装类型不同大小及形状的产品。

Automatic side sealing shrink wrapping machine is an intermediate speed type automatic sealing and cutting heat shrink packing machine which we design and produce in the high-speed automatic edge sealing machine basis, according to the different needs of the domestic market and customers. It uses photoelectric to automatically detect products, achieve automatic unmanned packing and high efficiency, and it is suitable for all kinds of packaging products with different sizes and shapes.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BTH-400	BM-500
最大包装尺寸	Max Packing Size	L不限No limited W≤400mm (H)≤160mm (W+H)≤400mm	(L)700×(W)400×(H)200mm
最大封口尺寸	Max Sealing Size	L不限mm (W)≤400mm	(L)1000×(W)450×(H)250mm(炉腔尺寸)
包装速度	Packing Speed	10~30包/分钟 packs/min	0~15m/min
电源及总功率	Electric Supply & Power	220V/50Hz 1.3kw	380V/50Hz 12kw
使用气源	Air Pressure	5.5kg/cm³	/
机器重量	Weight	450kg	240kg
机器外形尺寸	Overall Dimension	(L)1820×(W)1035×(H)1500mm	(L)1300×(W)700×(H)1400mm

BTH-450A+BM-500L

全自动高速边封热收缩包装机

Automatic High Speed Side Sealiing Shrink Wrapping Machine



产品概述/PRODUCT INTRODUCTION

采用触摸屏，各种设置、操作均可在触摸屏上轻松完成。同时可提前贮存多种产品数据，使用时只需从电脑里调出参数即可。由伺服马达控制封切，保证封切定位精确及封切线条优良。同时采用边封设计，产品包装长度不限。

This machine adopts touch screen,all kinds of settings and operations can be easily completed on the touch screen. At the same time, it can store a variety of product data in advance,and only need to call out the parameters from the computer.The servo motor controls the sealing and cutting to ensure the accurate positioning and excellent sealing and cutting line. At the same time, the side sealing design is adopted, and the product packaging length is unlimited.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BTH-450A	BM-500L
最大包装尺寸	Max packing size	(L)不限No limited (W+H)≤400mm (H)≤150mm	(L)不限No limited × (W)450 × (H)250mm
最大封口尺寸	Max sealing size	(L)不限No limited (W+H)≤450mm	(L)1500 × (W)500 × (H)300mm(炉腔尺寸)
包装速度	Packing Speed	30 ~ 60包/分钟 packs/min	0-30m/min
电源及总功率	Electric Supply & Power	380V/50Hz 3kw	380V/50Hz 16kw
最大电流	Max Current	10A	32A
使用气源	Air Pressure	5.5kg/cm²	/
机器重量	Weight	930kg	470kg
机器外形尺寸	Overall Dimension	(L)2070 × (W)1615 × (H)1682mm	(L)1800 × (W)1100 × (H)1300mm

BTH-550+BM-500L

全自动边封热收缩包装机

Automatic Side Sealing Shrink Wrapping Machine



产品概述/PRODUCT INTRODUCTION

本机适用于包装较长的物品（如：木地板、铝型材等）。采用先进PLC可编程控制器，具有安全保护及报警装置，确保机器高速运转稳定性，各种设置操作均可在触摸屏上轻松完成。采用边封设计，产品包装长度无限制，封口线高度可根据包装物高度而调整。配有进口检测光电，水平、垂直检测各一组，便于切换选择。

The machine is suitable for packing long items (such as wood, aluminum, etc.). Adopt the most advanced plc programmable controller, with safety protection and alarm device, ensure the machine high-speed stability, a variety of settings can be easily completed on the touch screen operation.Use side sealing design,no limited of product packaging length, the sealing line height can be adjusted according to the packing product height. Equipped with imported detection photoelectric, horizontal and vertical detection in one group, easy to switch selection.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BTH-550	BM-500L
最大包装尺寸	Max packing size	(L)不限No limited (W+H)≤500mm (H)≤250mm	(L)不限No limited × (W)450 × (H)250mm
最大封口尺寸	Max sealing size	(L)不限No limited (W+H)≤550mm	(L)1500 × (W)500 × (H)300mm(炉腔尺寸)
包装速度	Packing Speed	15 ~ 35包/分钟 packs/min	0-30m/min
电源及总功率	Electric Supply & Power	220V/50Hz 3kw	380V/50Hz 16kw
最大电流	Max Current	6A	32A
使用气源	Air Pressure	5.5kg/cm²	/
机器重量	Weight	650kg	470kg
机器外形尺寸	Overall Dimension	(L)2000 × (W)1270 × (H)1300mm	(L)1800 × (W)1100 × (H)1300mm

BTH-700+BM-700L

全自动边封热收缩包装机

Automatic Side Sealing Shrink Wrapping Machine



产品概述/PRODUCT INTRODUCTION

本机适用于包装较宽较长的物品（如：木地板、相框、铝型材等）。采用先进PLC可编程控制器，具有安全保护及报警装置，确保机器高速运转稳定性，各种设置操作均可在触摸屏上轻松完成。采用边封设计，产品包装长度无限制，封口线高度可根据包装物高度而调整。配有进口检测光电，水平、垂直检测各一组，便于切换选择。

The machine is suitable for packing long items (such as wood, aluminum, etc.). Adopt the most advanced plc programmable controller, with safety protection and alarm device, ensure the machine high-speed stability, a variety of settings can be easily completed on the touch screen operation. Use the side sealing design, no limit of product packaging length, the sealing line height can be adjusted according to the height of packing product.Equipped with imported detection photoelectric, horizontal and vertical detection in one group, easy to switch selection.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BTH-700	BM-700L
最大包装尺寸	Max packing size	(L)不限No limited (W+H)≤650mm (H)≤250mm	(L)不限No limited × (W)680 × (H)280mm
最大封口尺寸	Max sealing size	(L)不限No limited (W+H)≤700mm	(L)1500 × (W)700 × (H)300mm(炉腔尺寸)
包装速度	Packing Speed	15 ~ 35包/分钟 packs/min	0~30m/min
电源及总功率	Electric Supply & Power	220V/50Hz 3kw	380V/50Hz 16kw
最大电流	Max Current	6A	32A
使用气源	Air Pressure	5.5kg/cm³	/
机器重量	Weight	760kg	530kg
机器外形尺寸	Overall Dimension	(L)2250 × (W)1420 × (H)1300mm	(L)1800 × (W)1300 × (H)1300mm

BTH-1000+BM-1000

全自动边封热收缩包装机

Automatic Side Sealing Shrink Wrapping Machine



产品概述/PRODUCT INTRODUCTION

本机适用于包装较宽较长的物品（如：木地板、相框、铝型材等）。采用先进PLC可编程控制器，具有安全保护及报警装置，确保机器高速运转稳定性，各种设置操作均可在触摸屏上轻松完成。采用边封设计，产品包装长度无限制，封口线高度可根据包装物高度而调整。配有进口检测光电，水平、垂直检测各一组，便于切换选择。

This machine is suitable for packing long items (such as wood, aluminum, etc.).It adopts the most advanced PLC programmable controller,with safety protection and alarm device, to ensure the machine high-speed stability. A variety of Settings can be easily completed on the touch screen operation. Use side sealing design, there is no limit of product packaging length.The sealing line height can be adjusted according to the packing product height.It is equipped with imported detection photoelectric,horizontal and vertical detection in one group, with easy to switch selection.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BTH-1000	BM-1000
最大包装尺寸	Max packing size	(L)不限No limited (W+H)≤950mm (H)≤250mm	(L)2000 × (W)1000 × (H)300mm
最大封口尺寸	Max sealing size	(L)不限No limited (W+H)≤1000mm	(L)2000 × (W)1200 × (H)400mm(炉腔尺寸)
包装速度	Packing Speed	15 ~ 25包/分钟 packs/min	0~30m/min
电源及总功率	Electric Supply & Power	220V/50Hz 3kw	380V/50Hz 35kw
最大电流	Max Current	6A	40A
使用气源	Air Pressure	5.5kg/cm³	/
机器重量	Weight	950kg	500kg
机器外形尺寸	Overall Dimension	(L)2644 × (W)1575 × (H)1300mm	(L)3004 × (W)1640 × (H)1520mm

BM-500L/BM-700L
恒温收缩包装机
Constant Temperature Shrink Tunnel



产品概述/PRODUCT INTRODUCTION

本机采用滚轴式输送带，滚筒外包耐高温硅胶管每根均可自由转动。同时采用不锈钢加热管，内部三层隔热，双向热循环风使热量均匀，恒温。进口双变频调速，可调整吹风和输送速度，以达最佳效果。带有三层防爆玻璃观察窗，可直视炉内产品收缩情况。

The machine adopts roller conveyor, high temperature resistant silicone tube each drum outsourcing can free rotation. Stainless steel heating tube, three layers of internal insulation, bi-directional thermal cycling wind heat evenly, constant temperature.Imported double frequency conversion, can adjust the blowing and conveying speed to achieve the best effect.With three layers of explosion-proof glass observation window to easy watch packing result of each product.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BM-500L	BM-700L
电源及总功率	Power Supply and Total Power	380v/50-60Hz 16kw	380v/50-60Hz 16kw
包装速度	Packing Speed	0-30m/min	0-30m/min
收缩炉腔尺寸	Chamber Size	(L)1500×(W)500×(H)300mm	(L)1500×(W)700×(H)300mm
机器重量	Weight	470kg	530kg
机器外形尺寸	Overall Dimension	(L)1800×(W)1100×(H)1300mm	(L)1800×(W)1300×(H)1300mm
适用收缩膜	Shrink film	PE、POF、PVC、PP	PE、POF、PVC、PP

BTX-6040+BM-6040
自动袖口式封切热收缩包装机
Automatic Sleeve Shrink Wrapping Machine



产品概述/PRODUCT INTRODUCTION


适用于饮料、啤酒、矿泉水、纸箱等集合或单一产品的大批量收缩包装。本机采用“PLC”可编程程序和智能触摸屏配置，实现机、电气一体化，自动进料、裹膜、封切、收缩、冷却定型，无需人工操作的自动化包装设备。整套机器可实现与生产线的无人化操作连接。

It is suitable for mass shrink packaging of beverage,beer,mineral water ,carton, etc. this machine adopts “PLC” programmable program and intelligent touch screen configuration to realize the integration of machine and electricity,automatic feeding,wrapping film, sealing and cutting, shrink, cooling and finalizing automatic packaging equipment without manual operation. The whole machine can be connected with the production line without human operation.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BTX-6040	型号	Model	BM-6040
电源电压	Electric Supply & Power	220-240V/50-60Hz	电源电压	Electric Supply & Power	3Phase 220V,380-460V/50-60Hz
最大包装尺寸	Max Packing Size	(L)600×(W)500×(H)250mm W+H≤650mm	加热管功率	Heating Tube Power	21kw
工作效率	Working Efficiency	8-12 sets/min.	收缩炉尺寸	Tunnel Size	(L)1800×(W)650×(H)340mm
气压	Air Pressure	1HP/2kw	机器尺寸	Overall Dimension	(L)3000×(W)1185×(H)1550mm
输送带宽度	Belt Width	550mm	机器重量	Weight	850kg
机器尺寸	Overall Dimension	(L)1750×(W)1260×(H)1875mm			
机器重量	Weight	300kg			

BTB-300
透明膜三维包装机
Cellophane Wrapping Machine

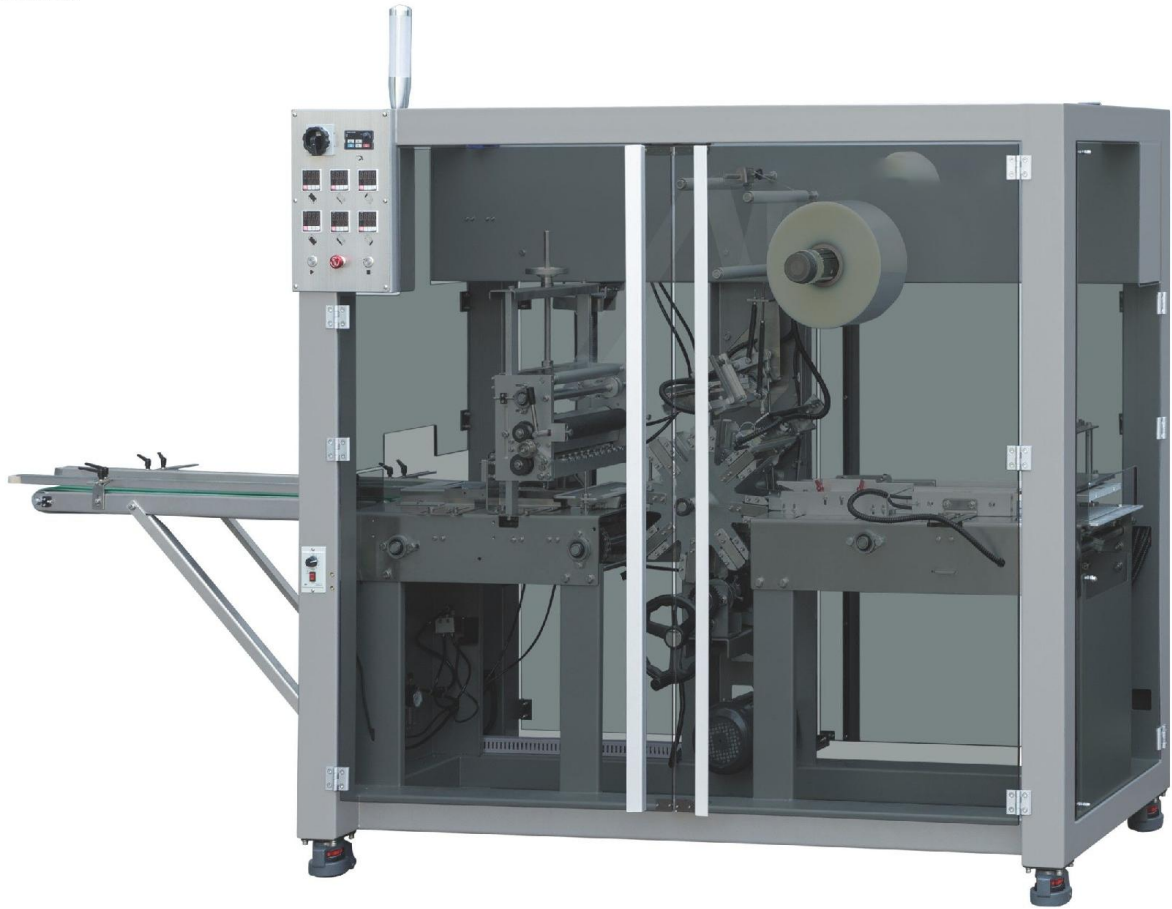

产品概述/PRODUCT INTRODUCTION

本机适用于各行业中的单件盒式物品的薄膜自动包装（带金拉线）。采用先进PLC可编程控制器，具有安全门保护及报警装置，确保机器高速运转稳定性，各种设置操作均可在触摸屏上轻松完成。更换模具时无需调节机器两侧工作台面高度，无需拆装出料链条。

This machine is suitable for automatic packaging of single box items in various industries (with gold tear tape). Using the most advanced PLC programmable controller, it has the safety door protection and alarm device to ensure the stability of the machine at high speed. All kinds of operation can be done easily on the touch screen. There is no need to adjust the height of the working table on both sides of the machine when replacing the mould, no need to disassemble the chain and hopper.

主要技术参数/MAIN TECHNICAL PARAMETERS

包装材料	Packing Material	BOPP烟膜及金拉线 film and gold tear tape
包装速度	Packing Speed	40 ~ 80包/分钟 packs/min
最大包装尺寸	Packing Size	(L)240 × (W)120 × (H)60mm
电源及总功率	Electric Supply & Power	220V 50Hz 5kw
机器重量	Weight	760kg
机器外形尺寸	Overall Dimension	(L)2001 × (W)923 × (H)1779mm

BTB-290
透明膜三维包装机
Cellophane Wrapping Machine



产品概述/PRODUCT INTRODUCTION

本机适用于各行业中的单件盒式物品的薄膜自动包装（带金拉线）。本机整体机架采用碳钢、落地多开安全门结构，采用平推式推盒结构，更换模具简单，调节距离多处采用手摇式调节尺寸，大大节省换模具时间，固定膜处采用气胀轴辊固定，使换膜更简单、快速。

This machine is suitable for film automatic wrapping of single box articles in various industries (with gold tear tape). The whole frame of the machine adopts carbon steel plastic spraying, landing multi-open safety door structure, flat push box structure, easy to change the mold, adjust the distance to adjust the size by hand, greatly save the time to change the mold, the fixed film is fixed by air expansion shaft roller, so that the film is more simple and faster.

主要技术参数/MAIN TECHNICAL PARAMETERS

包装材料	Packing Material	BOPP烟膜及金拉线 film and gold tear tape
包装速度	Packing Speed	30 ~ 70包/分钟 packs/min
最大包装尺寸	Packing Size	(L)60~260 × (W)30~160 × (H)15~70mm 【 L+W(mm)≤280, W+H(mm)≤180 】
电源及总功率	Electric Supply & Power	220V 50Hz 5kw
机器重量	Weight	380kg
机器外形尺寸	Overall Dimension	(L)2450 × (W)850 × (H)1700mm

BTB-290+LMT-290
透明膜三维包装机
Cellophane Wrapping Machine



产品概述/PRODUCT INTRODUCTION

本机适用于各行业中的单件盒式物品的薄膜自动包装（带金拉线）。本机整体机架采用碳钢、落地多开安全门结构，采用平推式推盒结构，更换模具简单，调节距离多处采用手摇式调节尺寸，大大节省换模具时间，固定膜处采用气胀轴辊固定，使换膜更简单、快速。

This machine is suitable for film automatic wrapping of single box articles in various industries (with gold tear tape). The whole frame of the machine adopts carbon steel plastic spraying, landing multi-open safety door structure, flat push box structure, easy to change the mold, adjust the distance to adjust the size by hand, greatly save the time to change the mold, the fixed film is fixed by air expansion shaft roller, so that the film is more simple and faster.

主要技术参数/MAIN TECHNICAL PARAMETERS

型号	Model	BTB-290	LMT-290
包装材料	Packing material	BOPP烟膜及拉线film and tear tape	BOPP烟膜及拉线film and tear tape
最大包装尺寸	Max Packing Size	(L)≤260 (W)≤160 (H)≤70mm (L+H)≤280mm (W+H)≤180mm	(L)360×(W)240×(H)120mm
包装速度	Packing Speed	30 ~ 70packs per min	/
电源及总功率	Electric Supply&Power	220V/50Hz 5kw	220V/50Hz 1kw
机器重量	Weight	380kg	100kg
机器外形尺寸	Overall Dimension	(L)1500×(W)1650×(H)1700mm	(L)950×(W)650×(H)1420mm

BTB-480
透明膜三维包装机
Cellophane Wrapping Machine



产品概述/PRODUCT INTRODUCTION

该机的工作是靠机器内部一系列的伺服电机带动各种连杆及部件来完成的，采用多功能数显变频无级调速，PLC编程控制技术，自动给盒，自动计数，触摸显示实现人机界面，吸气落膜；并可与其它生产线连机使用。

The work of this machine is to rely on a series of servo motor inside the machine to drive various connecting rods and components to complete, using multi-function digital frequency conversion stepless speed regulation, PLC programming control technology, automatic box feeding, automatic counting, touch display to achieve man-machine interface, suction film fall; And can be used with other production lines.

主要技术参数/MAIN TECHNICAL PARAMETERS

包装材料	Packing Material	BOPP烟膜及金拉线 film and gold tear tape
包装速度	Packing Speed	25-40包/分钟 packs/min
最大包装尺寸	Packing Size	(L)100-360 × (W)50-230 × (H)25-130mm
电源及总功率	Electric Supply & Power	220V 50Hz 6kw
机器重量	Weight	500kg
机器外形尺寸	Overall Dimension	(L)2320 × (W)980 × (H)1830mm

ZH-250P
自动装盒机
Automatic Cartoning Machine



产品概述/PRODUCT INTRODUCTION

ZH-250P卧式装盒机是我公司最新研制的产品，具有应用范围广,生产效率高,可一机多用等优点,适用于电子产品包装、食品包装、化妆品包装、药品包装及相关行业的包装。

ZH-250P horizontal cartoning machine is the latest product developed by our company. It has the advantages of wide application range, high production efficiency, and can be used for multiple purposes. At the same time, it is suitable for food packaging, cosmetic packaging and packaging in related industries, and has a wide range of applications.

主要技术参数/MAIN TECHNICAL PARAMETERS

最小包装尺寸	Min Packing Size	(L)70mm×(W)25mm×(H)15mm
最大包装尺寸	Max Packing Size	(L)235mm×(W)135mm×(H)60mm
包装速度	Packing Speed	30-70盒/分钟 Box/minute
电源及总功率	Electric Supply & Power	380V 50HZ 220V 50HZ
机器重量	Weight	500KG
机器外型尺寸	Overall Dimension	(L)2800mm×(W)1050mm×(H)1700mm

ZH-120
多功能自动装盒机
Multifunctional Automatic Cartoning Machine



产品概述/PRODUCT INTRODUCTION

本机能够适用于电子产品包装、食品包装、化妆品包装及相关行业的包装，使用范围广泛。可以根据用户的不同使用要求定期更换产品,且模具调节时间短,装配及调试简便，装盒机出口可与各种类型的中盒薄膜包装设备相匹配。既适用于大批量单一品种的生产,又可以满足用户小批量多品种的生产。

This machine can pack various specifications of medicine boards, traditional Chinese medicine products, ampoules, vials and small long bodies and other regular items. At the same time, it is suitable for food packaging, cosmetic packaging and packaging in related industries, and has a wide range of applications. The products can be replaced regularly according to the different requirements of users, and the mold adjustment time is short, the assembly and debugging are simple, and the cartoning machine outlet can be matched with various types of middle box film packaging equipment. It is not only suitable for the production of a single variety in large quantities, but also for the production of small batches of multiple varieties by users.

主要技术参数/MAIN TECHNICAL PARAMETERS

最小包装尺寸	Min Packing Size	(L)70mm×(W)25mm×(H)15mm
最大包装尺寸	Max Packing Size	(L)230mm×(W)80mm×(H)50mm
包装速度	Packing Speed	50-100盒/分钟 Box/minute
电源及总功率	Electric Supply & Power	380V 50HZ 0.75KW
机器重量	Weight	500KG
机器外型尺寸	Overall Dimension	(L)2800mm×(W)1050mm×(H)1700mm

ZH-350

多功能装盒机

Automatic Cartoning Machine



产品概述/PRODUCT INTRODUCTION

本机能够适用于食品包装、化妆品包装及相关行业的包装，使用范围广泛。可以根据用户的不同使用要求定期更换产品,且模具调节时间短,装配及调试简便，装盒机出口可与各种类型的中盒、大盒薄膜包装设备相匹配。既适用于大批量单一品种的生产,又可以满足用户小批量多品种的生产。

This machine is suitable for packaging in food packaging, cosmetics packaging, and related industries, with a wide range of applications. The product can be replaced regularly according to different user requirements, and the mold adjustment time is short, assembly and debugging are simple. The packaging machine outlet can be matched with various types of medium and large box film packaging equipment. It is suitable for large-scale production of a single variety and can also meet the needs of users for small-scale production of multiple varieties.

主要技术参数/MAIN TECHNICAL PARAMETERS

最小包装尺寸	Min Packing Size	(L)100mm×(W)60mm×(H)15mm
最大包装尺寸	Max Packing Size	(L)330mm×(W)185mm×(H)60mm
包装速度	Packing Speed	20-40 boxes/min
电源及总功率	Electric Supply & Power	380V 50HZ 220V 50HZ 3KW
机器重量	Weight	500KG
机器外型尺寸	Overall Dimension	(L)3500mm×(W)1300mm×(H)1700mm (主机长度2000mm)

BTK-4540

纸箱自动成型封底机(针刺式)

Automatic Carton Folding and Sealing Machine
(Needling type)



产品概述/PRODUCT INTRODUCTION

本机通过展开箱子、折入下部翼，并粘贴胶带的简单设定处理大小不同的各种纸箱；合理化设计、机件性能精密耐用、运转稳固寿命长，效率高。本装备可单机作业，也可与自动流水线配套使用。

The machine handles various cartons of different sizes by simply setting the box, folding into the lower wing and pasting tape. The machine has the characteristics of rational design, precision and durability of the parts, long service life and high efficiency. The equipment can be operated on a single machine, or can be used in conjunction with an automatic assembly line.

主要技术参数/MAIN TECHNICAL PARAMETERS

最小包装尺寸	Min Packing Size	(L)250mm×(W)190mm×(H)110mm
最大包装尺寸	Max Packing Size	(L)450mm×(W)405mm×(H)350mm
包装速度	Packing Speed	0-15箱/分钟 cartons/min
电源及总功率	Electric Supply & Power	380V 50HZ 180W
机器重量	Weight	600KG
机器外型尺寸	Overall Dimension	(L)3020mm×(W)1250mm×(H)2000mm

BTK-500

开装封一体机

Erecting, Loading and Sealing All-in-one Machine



产品概述/PRODUCT INTRODUCTION

BTK-500型全自动立式装箱机是我公司结合国内外先进技术，开发的一种全新机电一体化自动装箱设备。该机由包装物自动码垛系统、储箱系统、开箱系统、装箱系统和封箱系统等组成；采用PLC+人机界面操作系统，由伺服驱动机构完成开箱与装箱动作。本机适用于各种规格的产品自动装箱，可以单机使用也可以与前端包装机联机使用。

BTK-500 automatic vertical carton packing machine is combined the domestic and oversea advanced technology. It is a wholly new and automatic mechatronics carton packing device. This machine has consist of automatic products collecting, carton storage, carton erecting system, carton loading system and carton sealing system. Adopts PLC+HMI operating system. Carton erecting and loading action is driven by Servo structure. The machine is suitable for the cartoning packing for different sizes products. Can be used by single machine or join in packing line and to finish the back-end packing line.

主要技术参数/MAIN TECHNICAL PARAMETERS

最小包装尺寸	Min Packing Size	(L)250mm×(W)150mm×(H)150mm
最大包装尺寸	Max Packing Size	(L)500mm×(W)400mm×(H)350mm
包装速度	Packing Speed	≥2箱cartons (抓箱频率10次/分钟) (10 times case grabbing /minute)
电源及总功率	Electric Supply & Power	380V 50HZ 3.0KW
机器重量	Weight	1200KG
机器外型尺寸	Overall Dimension	(L)3500mm×(W)3000mm×(H)2850mm

包装材料

Packging Materials


POF对折热收缩膜
Pof Film



BOPP烟膜卷材
Bopp Film Rolls



BOPP烟膜片材
Bopp Film Sheet

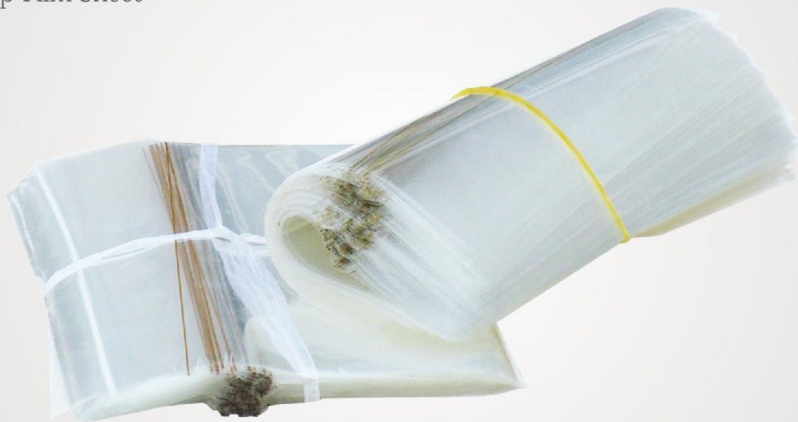

金拉丝
Gold Tear Tape

